

LXP-DAC-xxx

SFP+ Direct Attach Passive Copper Cables,0.5m,1m,3m,5m,7m,10m Reach

PRODUCT FEATURES

- Support for multi-gigabit data rates up to 10.5Gbps
- Data rates backward compatible to 1Gbps
- Hot-pluggable SFP 20PIN footprint
- I/O Connector designed for high speed differential signal applications
- Improved Pluggable FormFactor(IPF) compliant for enhanced EMI/EMC performance
- Compatible to SFP+ MSA
- Temperature Range: 0~ 70 °C
- Comply with RoHS 2.0



APPLICATIONS

- High capacity I/O in Storage Area Networks, Network Attached Storage, and Storage Servers
- Switched fabric I/O such as ultra high bandwidth switches and routers
- Data center cabling infrastructure
- High density connections between networking equipment

Product Description

The DAC SFP+ cable assemblies are high-performance, cost effective I/O solutions for 10Gb Ethernet and 10G Fibre Channel applications. SFP+ passive copper modules allow hardware manufacturers to achieve high port density, configurability and utilization at a very low cost and to reduce power budget. The high-speed cable assemblies meet and exceed the performance and reliability requirements stipulated by Gigabit Ethernet and Fibre Channel industry standard.

Ordering Information

Part Number	Product Description
LXP-DAC-001	SFP+ Direct Attach Passive Cable (10GSFP+Cu), 1m, AWG:30 , 0°C ~ +70°C
LXP-DAC-002	SFP+ Direct Attach Passive Cable (10GSFP+Cu), 2m, AWG:30 , 0°C ~ +70°C
LXP-DAC-003	SFP+ Direct Attach Passive Cable (10GSFP+Cu), 3m, AWG:30 , 0°C ~ +70°C
LXP-DAC-005	SFP+ Direct Attach Passive Cable (10GSFP+Cu), 5m, AWG:24 , 0°C ~ +70°C
LXP-DAC-007	SFP+ Direct Attach Passive Cable (10GSFP+Cu), 7m, AWG:24 , 0°C ~ +70°C
LXP-DAC-010	SFP+ Direct Attach Passive Cable (10GSFP+Cu), 10m, AWG:24 , 0°C ~ +70°C

Note: You can be customized diameter and distance.

I. Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Storage Ambient Temperature		-40		+85	°C

II. Systems

Performance	Media
10.5 Gpbs line speed, full duplex Bit error rate: better than 10E-12	Hot-pluggable, industry-standard Small Form-Factor Pluggable(SFP+) copper cable, available as 1m,3m or 5m.

III. Pin Definitions


Pin	Logic	Symbol	Name/Description	Notes
1		VeeT	Transmitter Ground	
2	LV-TTL-O	TX_Fault	N/A	1
3	LV-TTL-I	TX_DIS	Transmitter Disable	2
4	LV-TTL-I/O	SDA	Tow Wire Serial Data	
5	LV-TTL-I	SCL	Tow Wire Serial Clock	
6		MOD_DEF0	Module present, connect to VeeT	
7	LV-TTL-I	RS0	N/A	1
8	LV-TTL-O	LOS	LOS of Signal	2
9	LV-TTL-I	RS1	N/A	1

10		VeeR	Reciever Ground
11		VeeR	Reciever Ground
12	CML-O	RD-	Reciever Data Inverted
13	CML-O	RD+	Reciever Data Non-Inverted
14		VeeR	Reciever Ground
15		VccR	Reciever Supply 3.3V
16		VccT	Transmitter Supply 3.3V
17		VeeT	Transmitter Ground
18	CML-I	TD+	Transmitter Data Non-Inverted
19	CML_I	TD-	Transmitter Data Inverted
20		VeeT	Transmitter Ground

Notes:

1. Signals not supported in SFP+ Copper pulled-down to VeeT with 30K ohms resistor.
2. Passive cable assemblies do not support LOS and TX_DIS.

IV. Mechanical Diagram

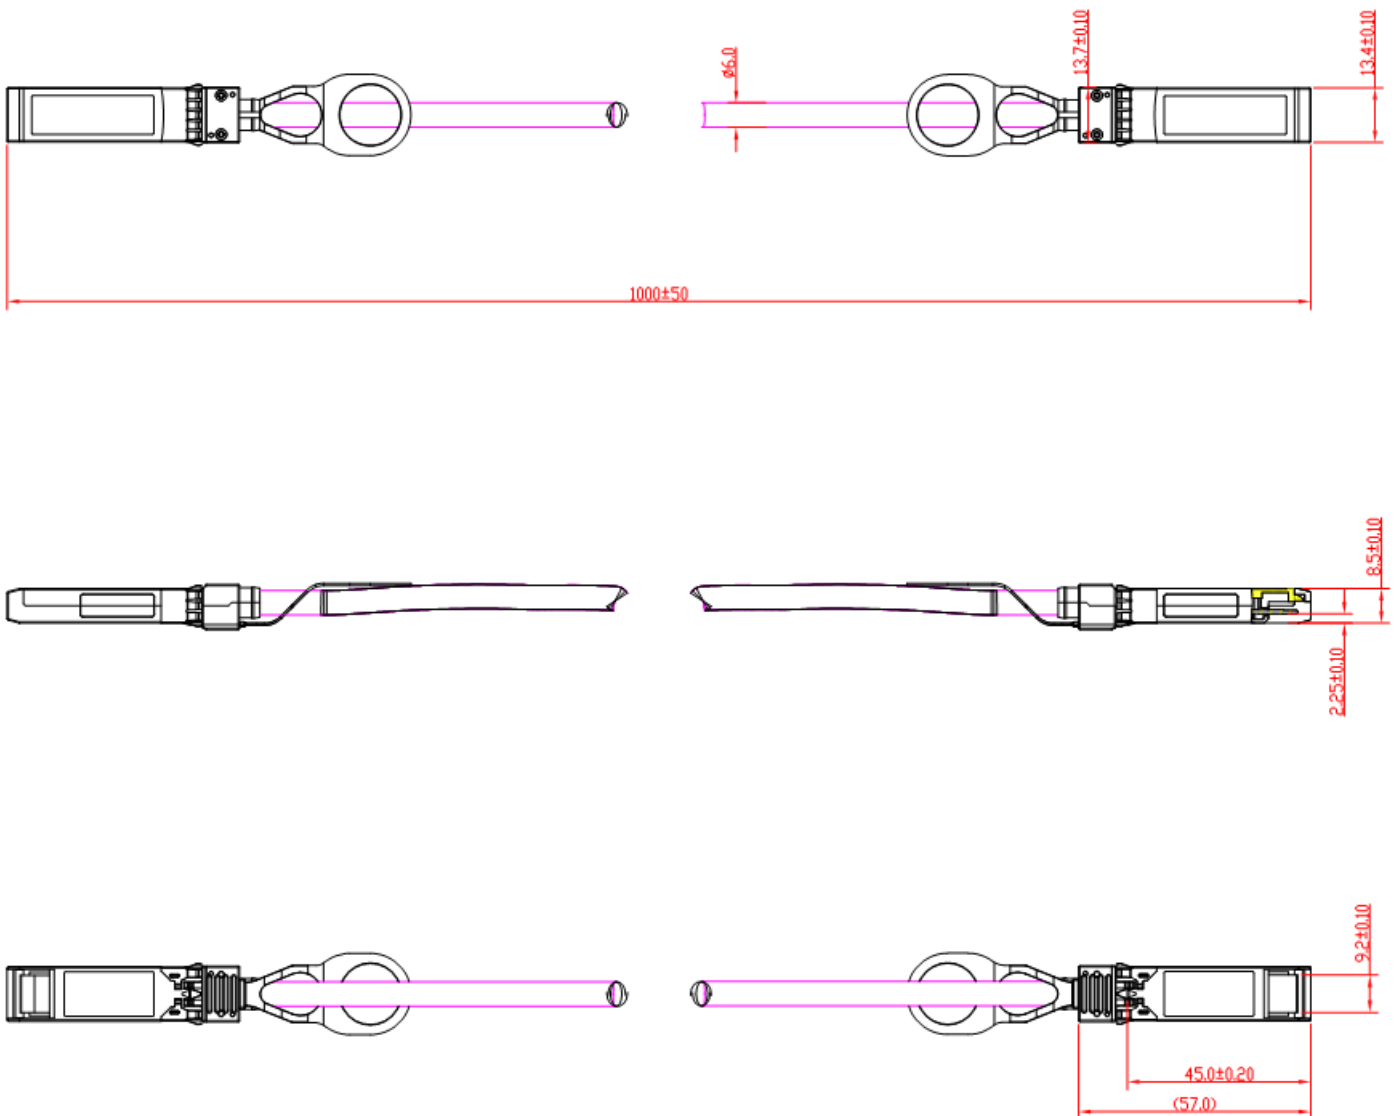

Revision History

Version No.	Date	Description
1.0	June 24, 2020	Preliminary datasheet